



Characterizing hydrologic properties of rocky surface soils in Garner Run, Susquehanna Shale Hills Critical Zone Observatory, Pennsylvania, USA

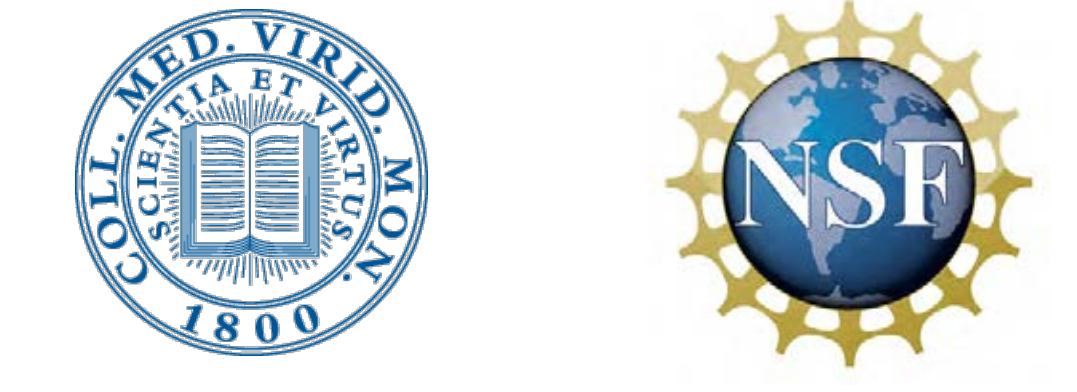


¹Perri Silverhart, ²Connor Martin, ³Joanmarie Del Vecchio, ³Li Li, ³Roman DiBiase

¹Department of Geology, Middlebury College; ²Department of Geology and Environmental Science, University of Pittsburgh; ³Department of Geosciences, Pennsylvania State University

Study Location

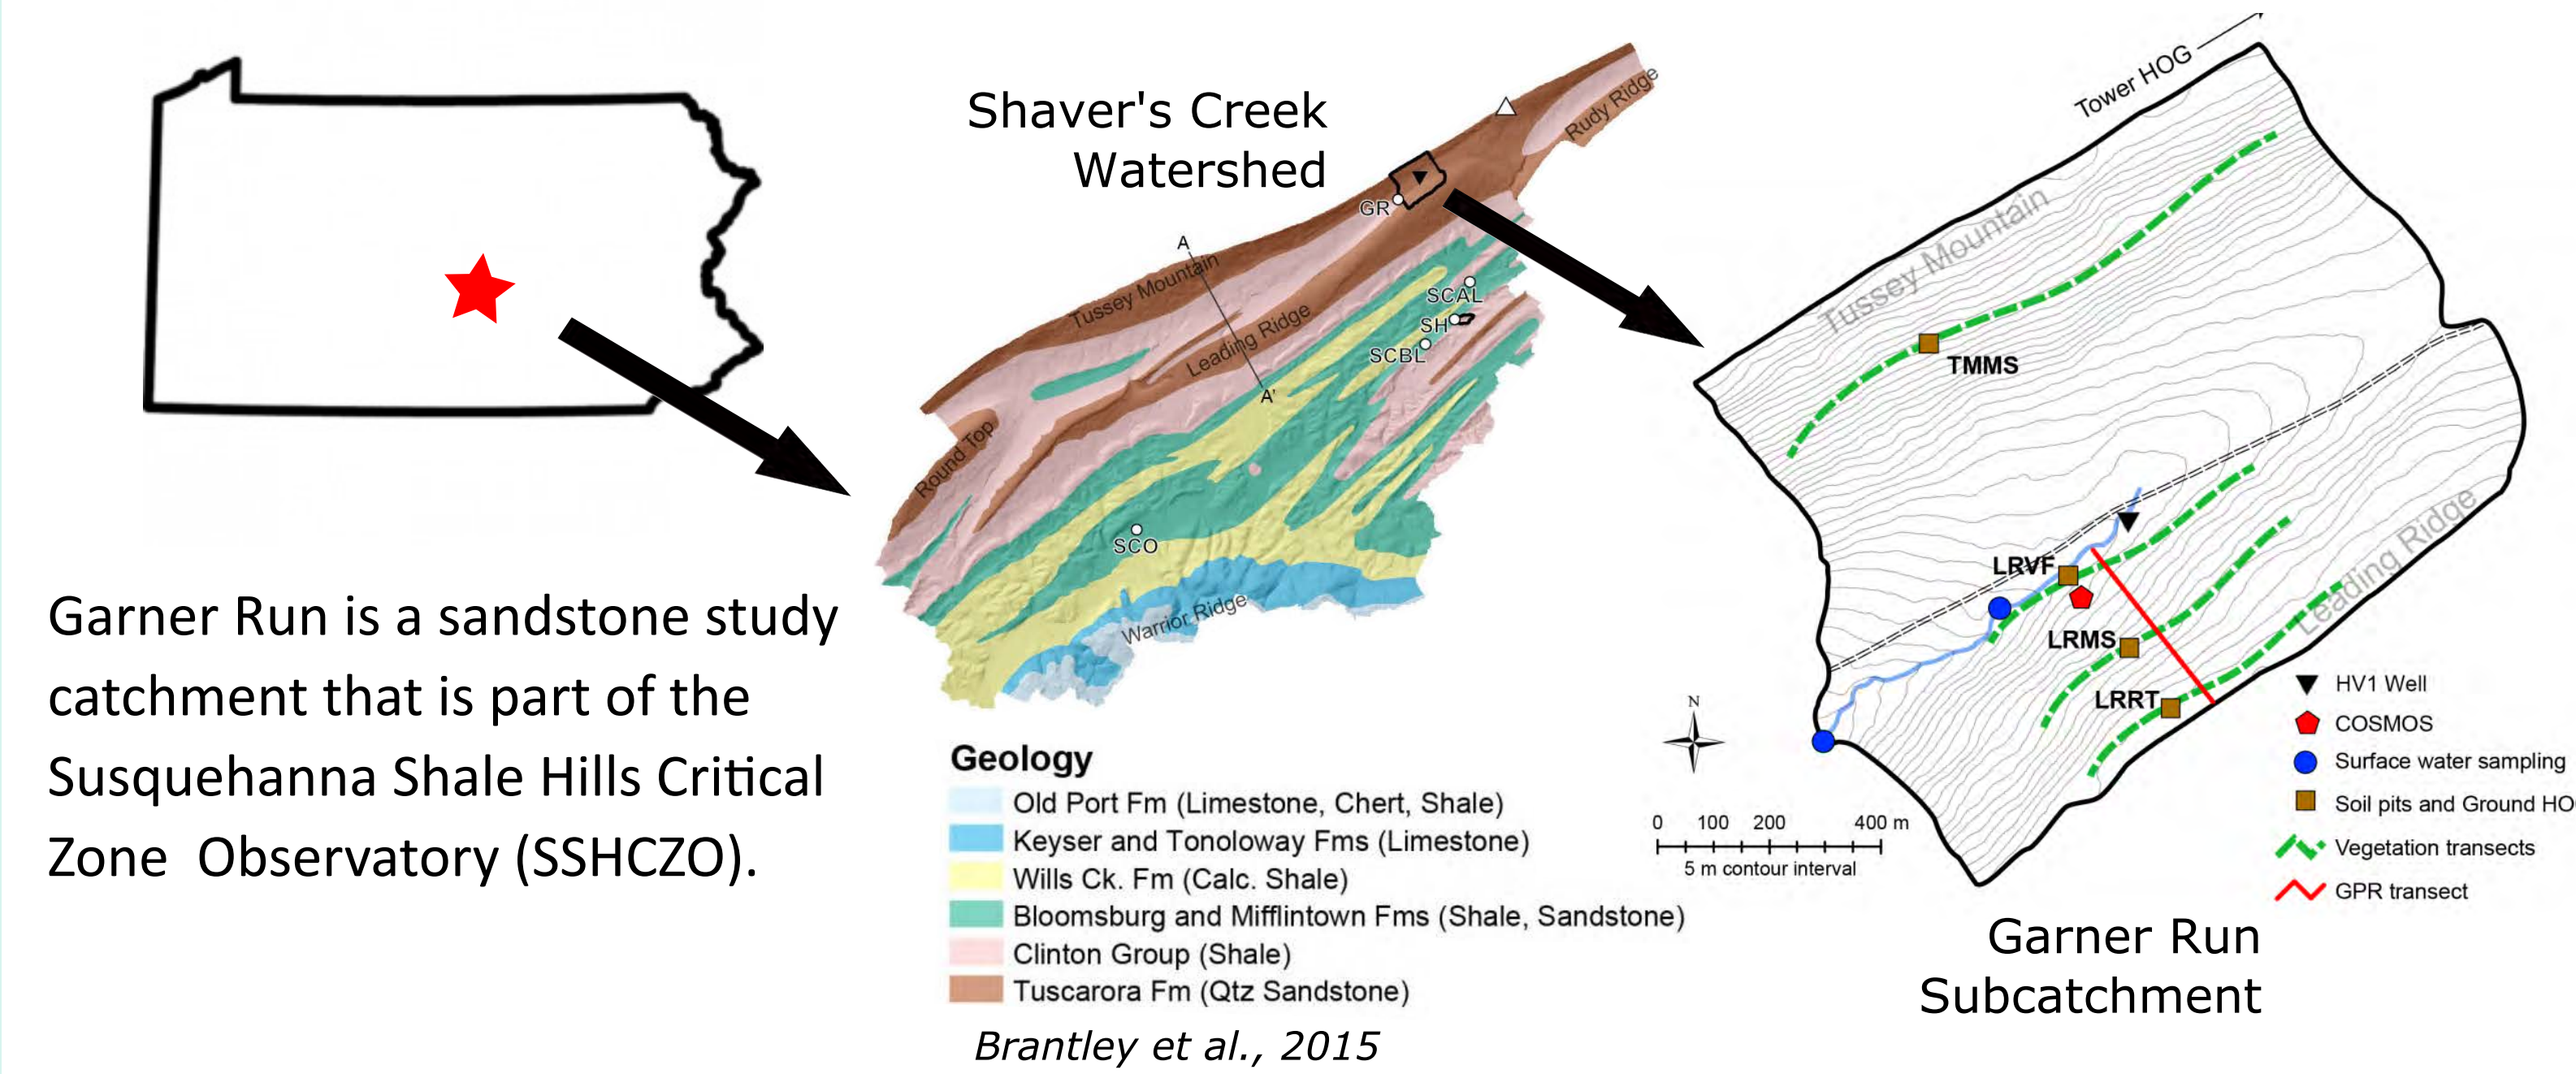

Approach

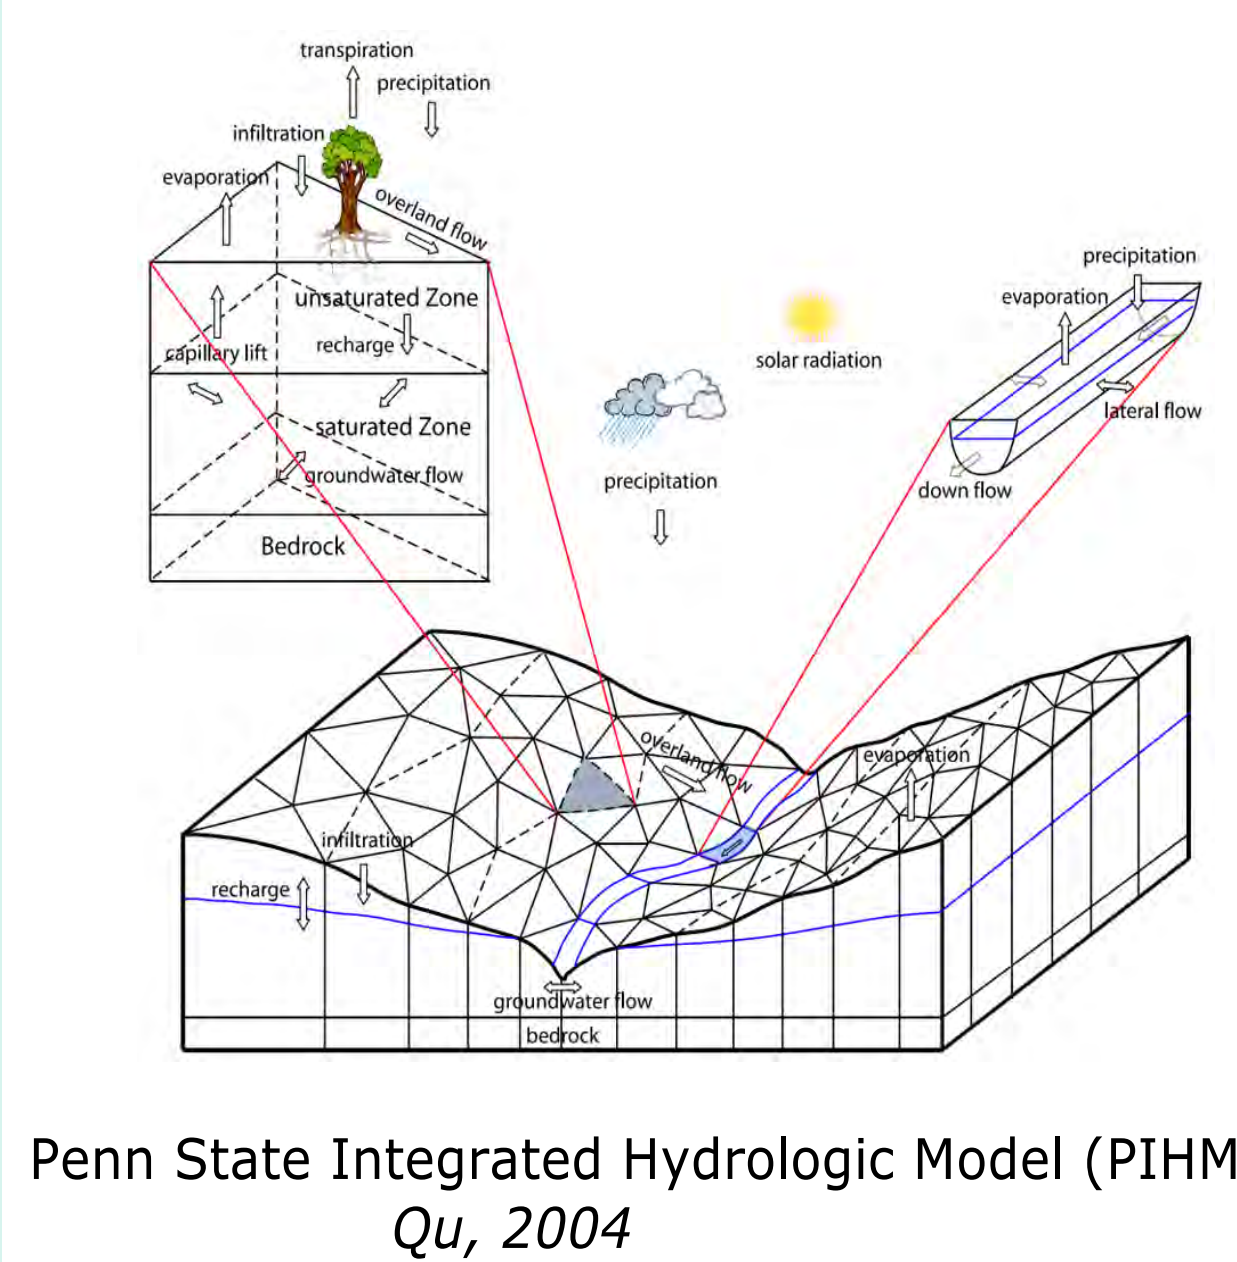

Penn State Integrated Hydrologic Modeling system (PIHM) is a powerful tool used to predict the hydrologic properties of a watershed.


The model requires an understanding of local soil properties, however the input files currently used for Garner Run do not have the spatial resolution to adequately represent the surficial heterogeneity of the subcatchment. Field measurements are necessary to accurately represent this observed heterogeneity.

Motivation

Soil hydrologic properties determine how water, solutes, and sediment move through the near surface environment. While robust methods exist for characterizing the hydrology of homogeneous, fine-grained soils, it is less clear how to incorporate rocky soils into critical zone models.

Surface Type

Heterogeneity in surface cover ranges from clay-rich soil to open boulder fields (right). The soil profile includes a thin, organic-rich A horizon and a variably present, sandy E horizon overlaying a clay-rich B horizon (below).

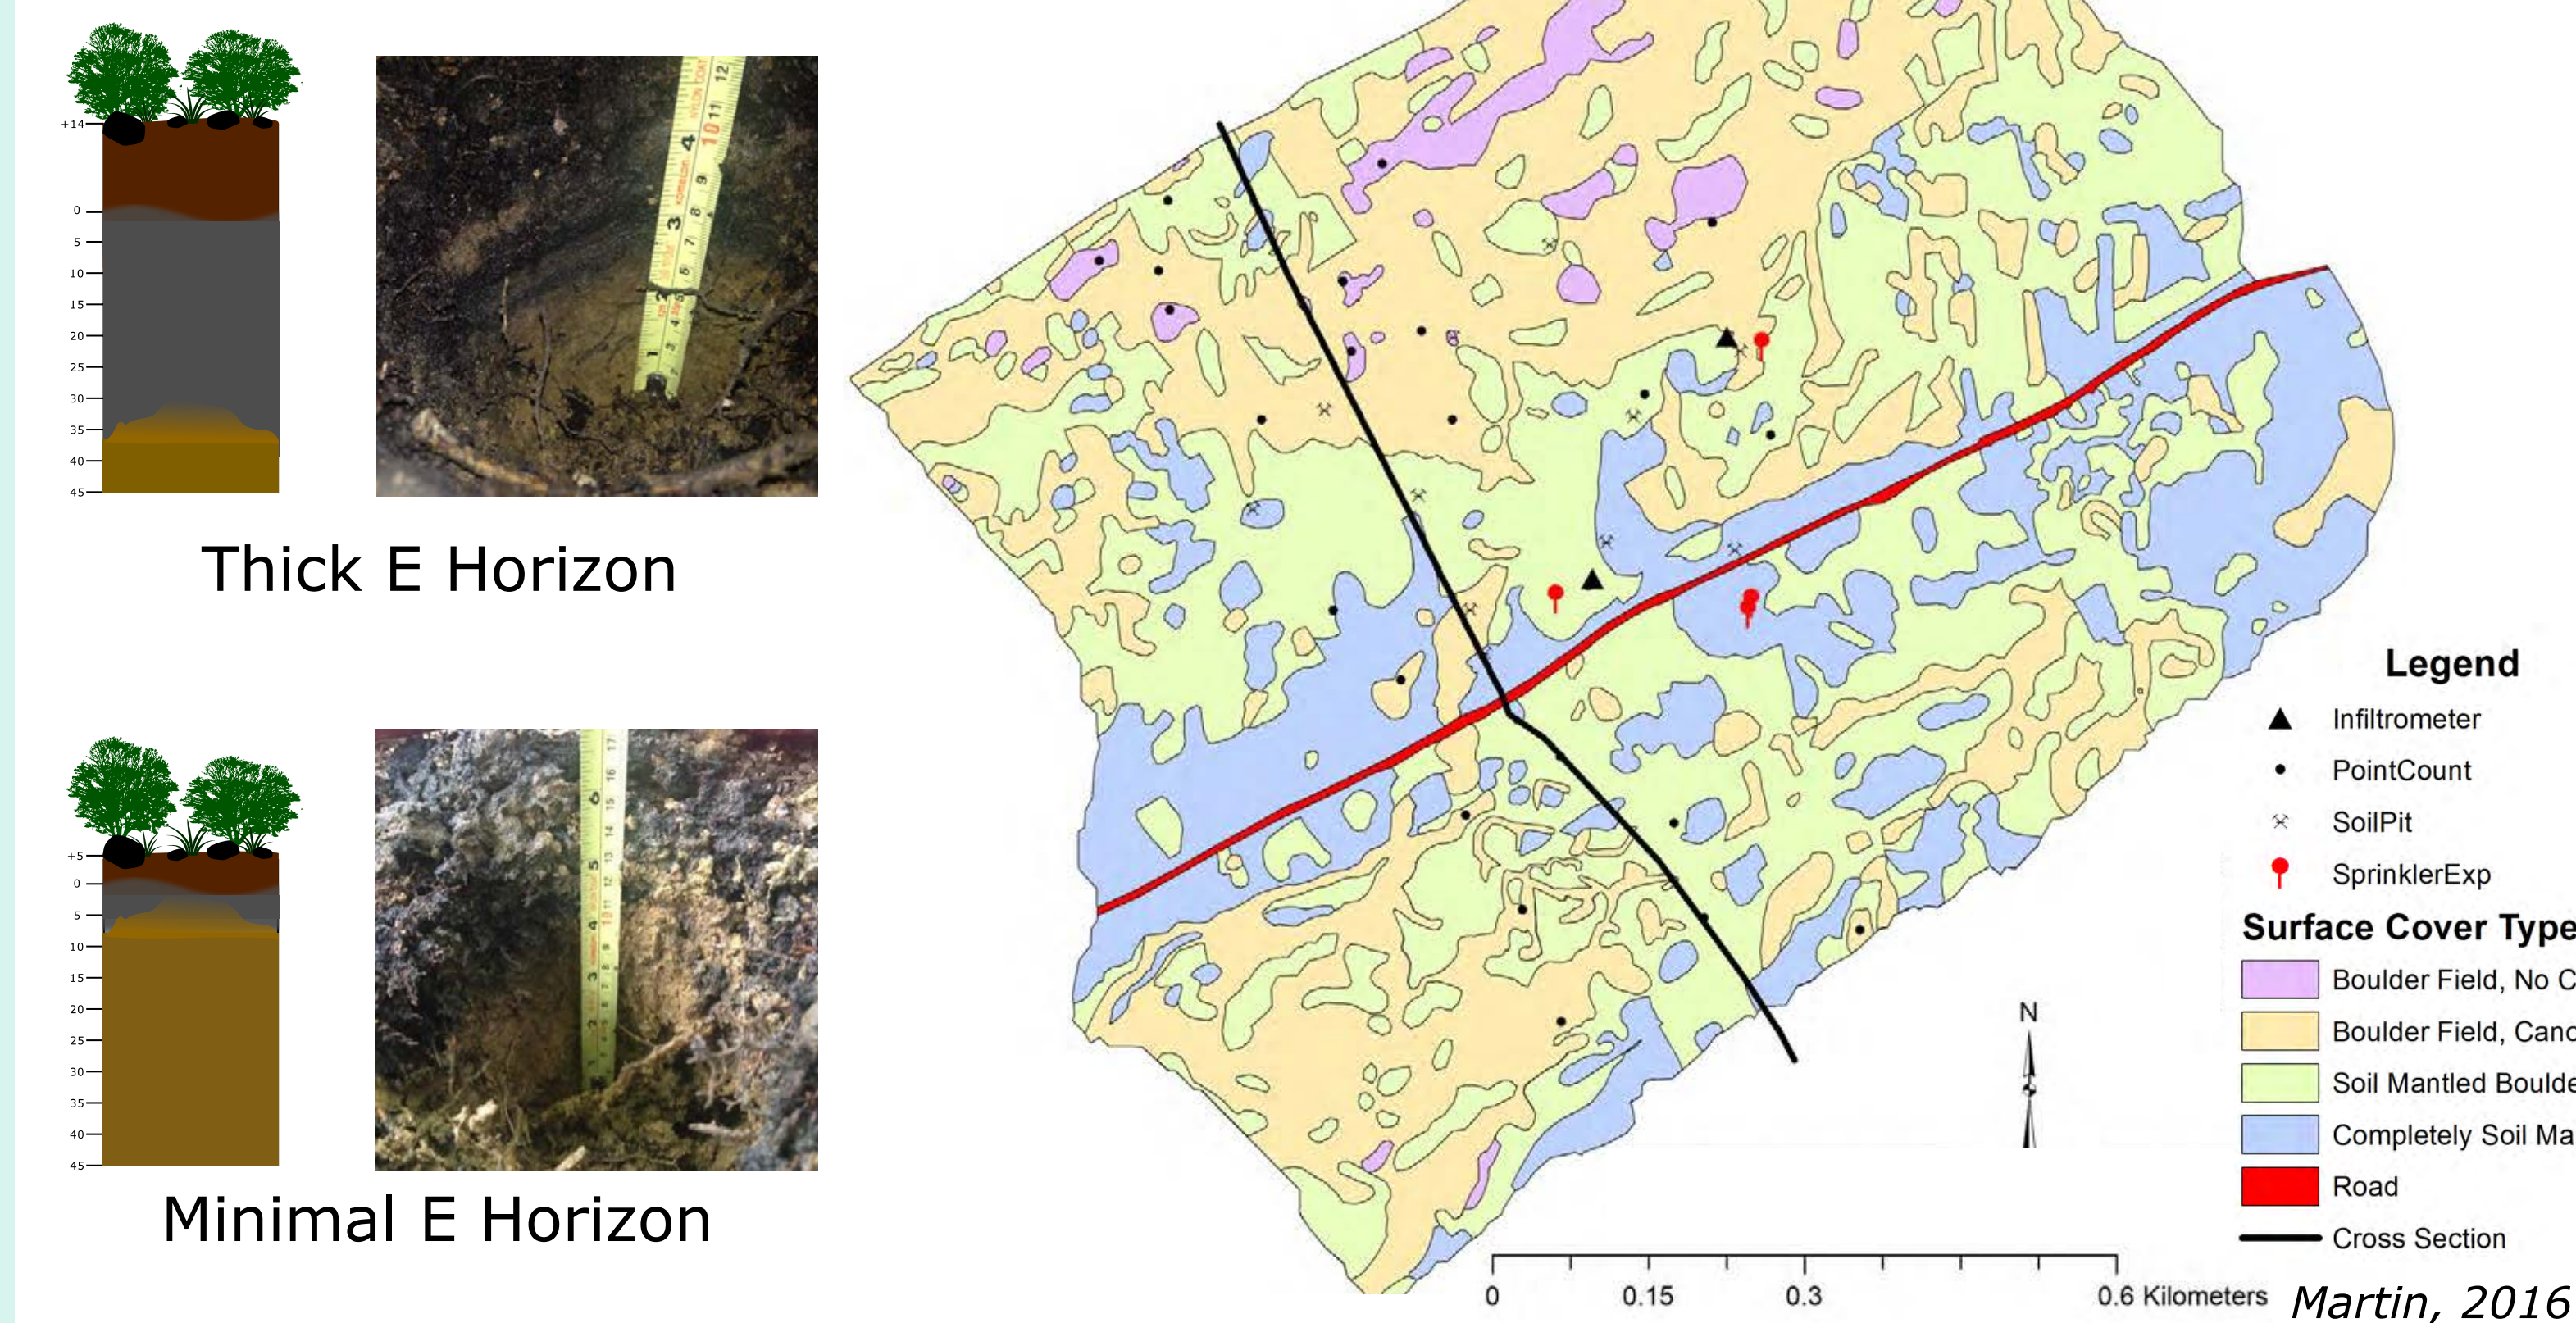

Sprinkling Experiments


- Plastic garden edging was used to define an approximately 1 m diameter "watershed"
- A 95 L water tank with a pump attached to a garden hose and showerhead was used to simulate rainfall (see right)
- Runoff was captured and measured whenever possible and qualitative observations were recorded



Experimental Conditions:




Runoff Rate

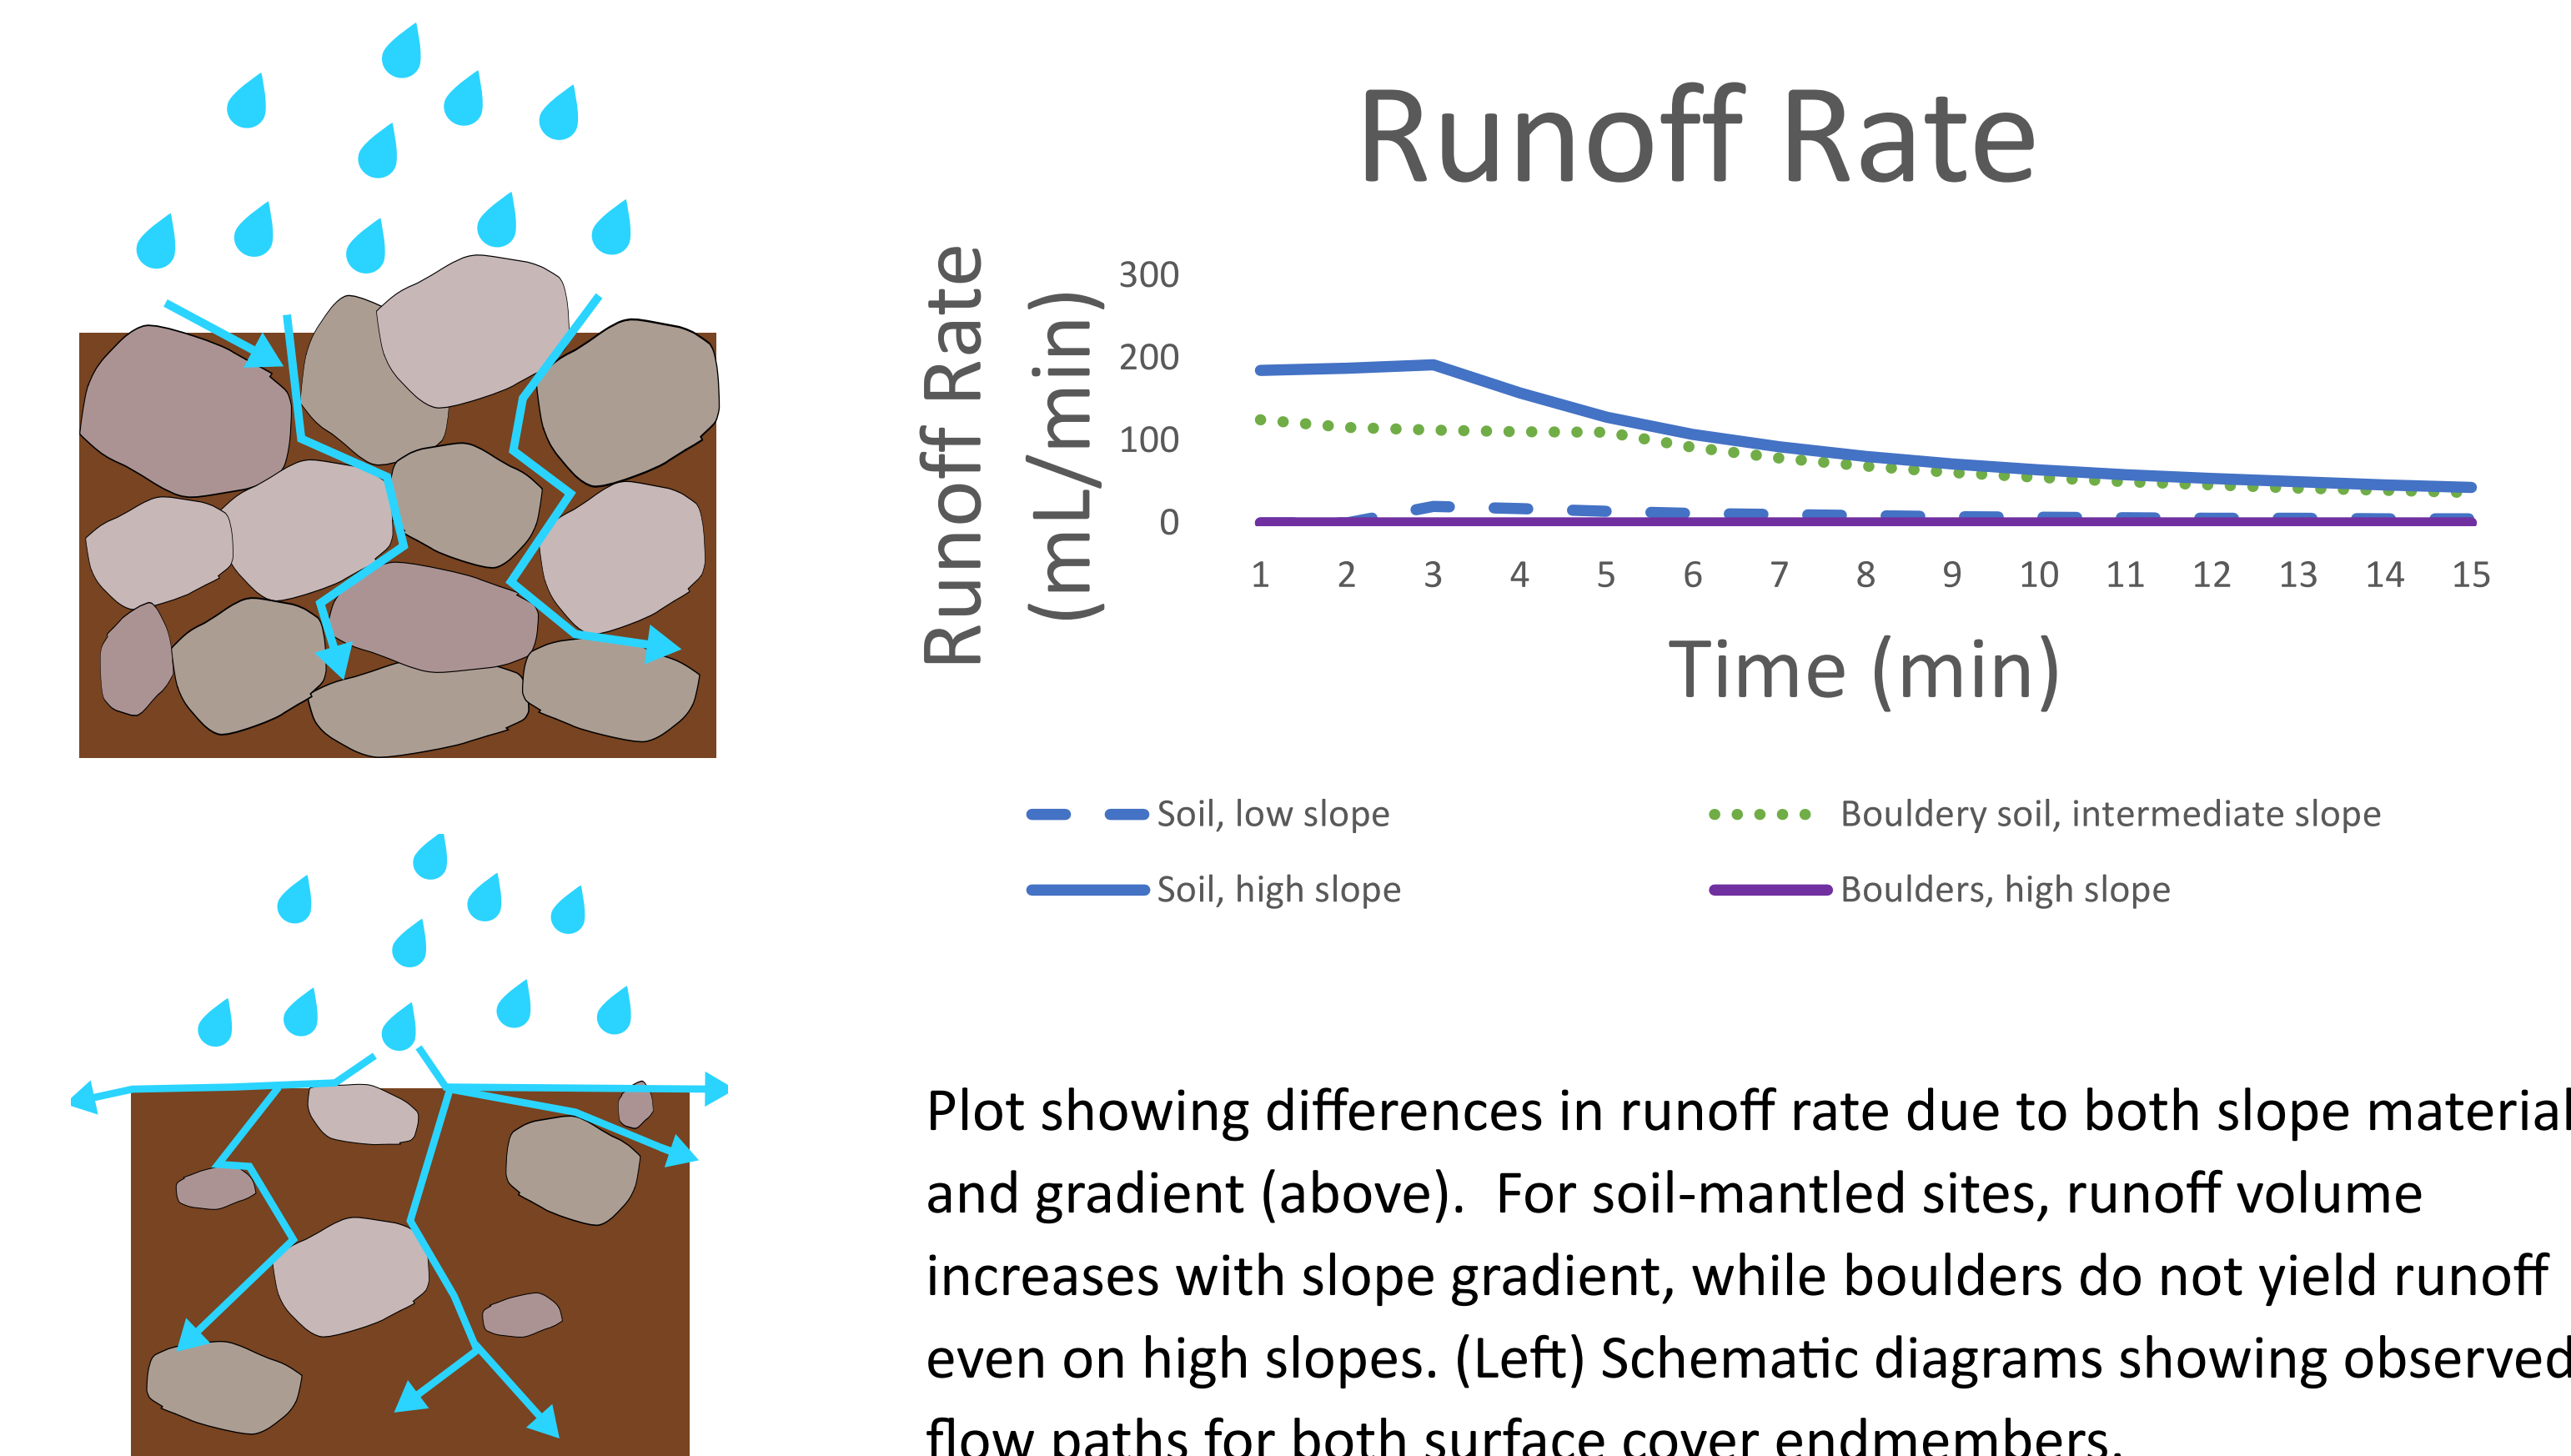


Ring Infiltrometer Tests

- Turf Tech Double Ring Infiltrometers were used to determine infiltration rates
- Readings were taken every 30 seconds over the course of 120 - 200 minutes
- Two experimental locations were selected on each soil endmember
- Two tests were conducted in each location

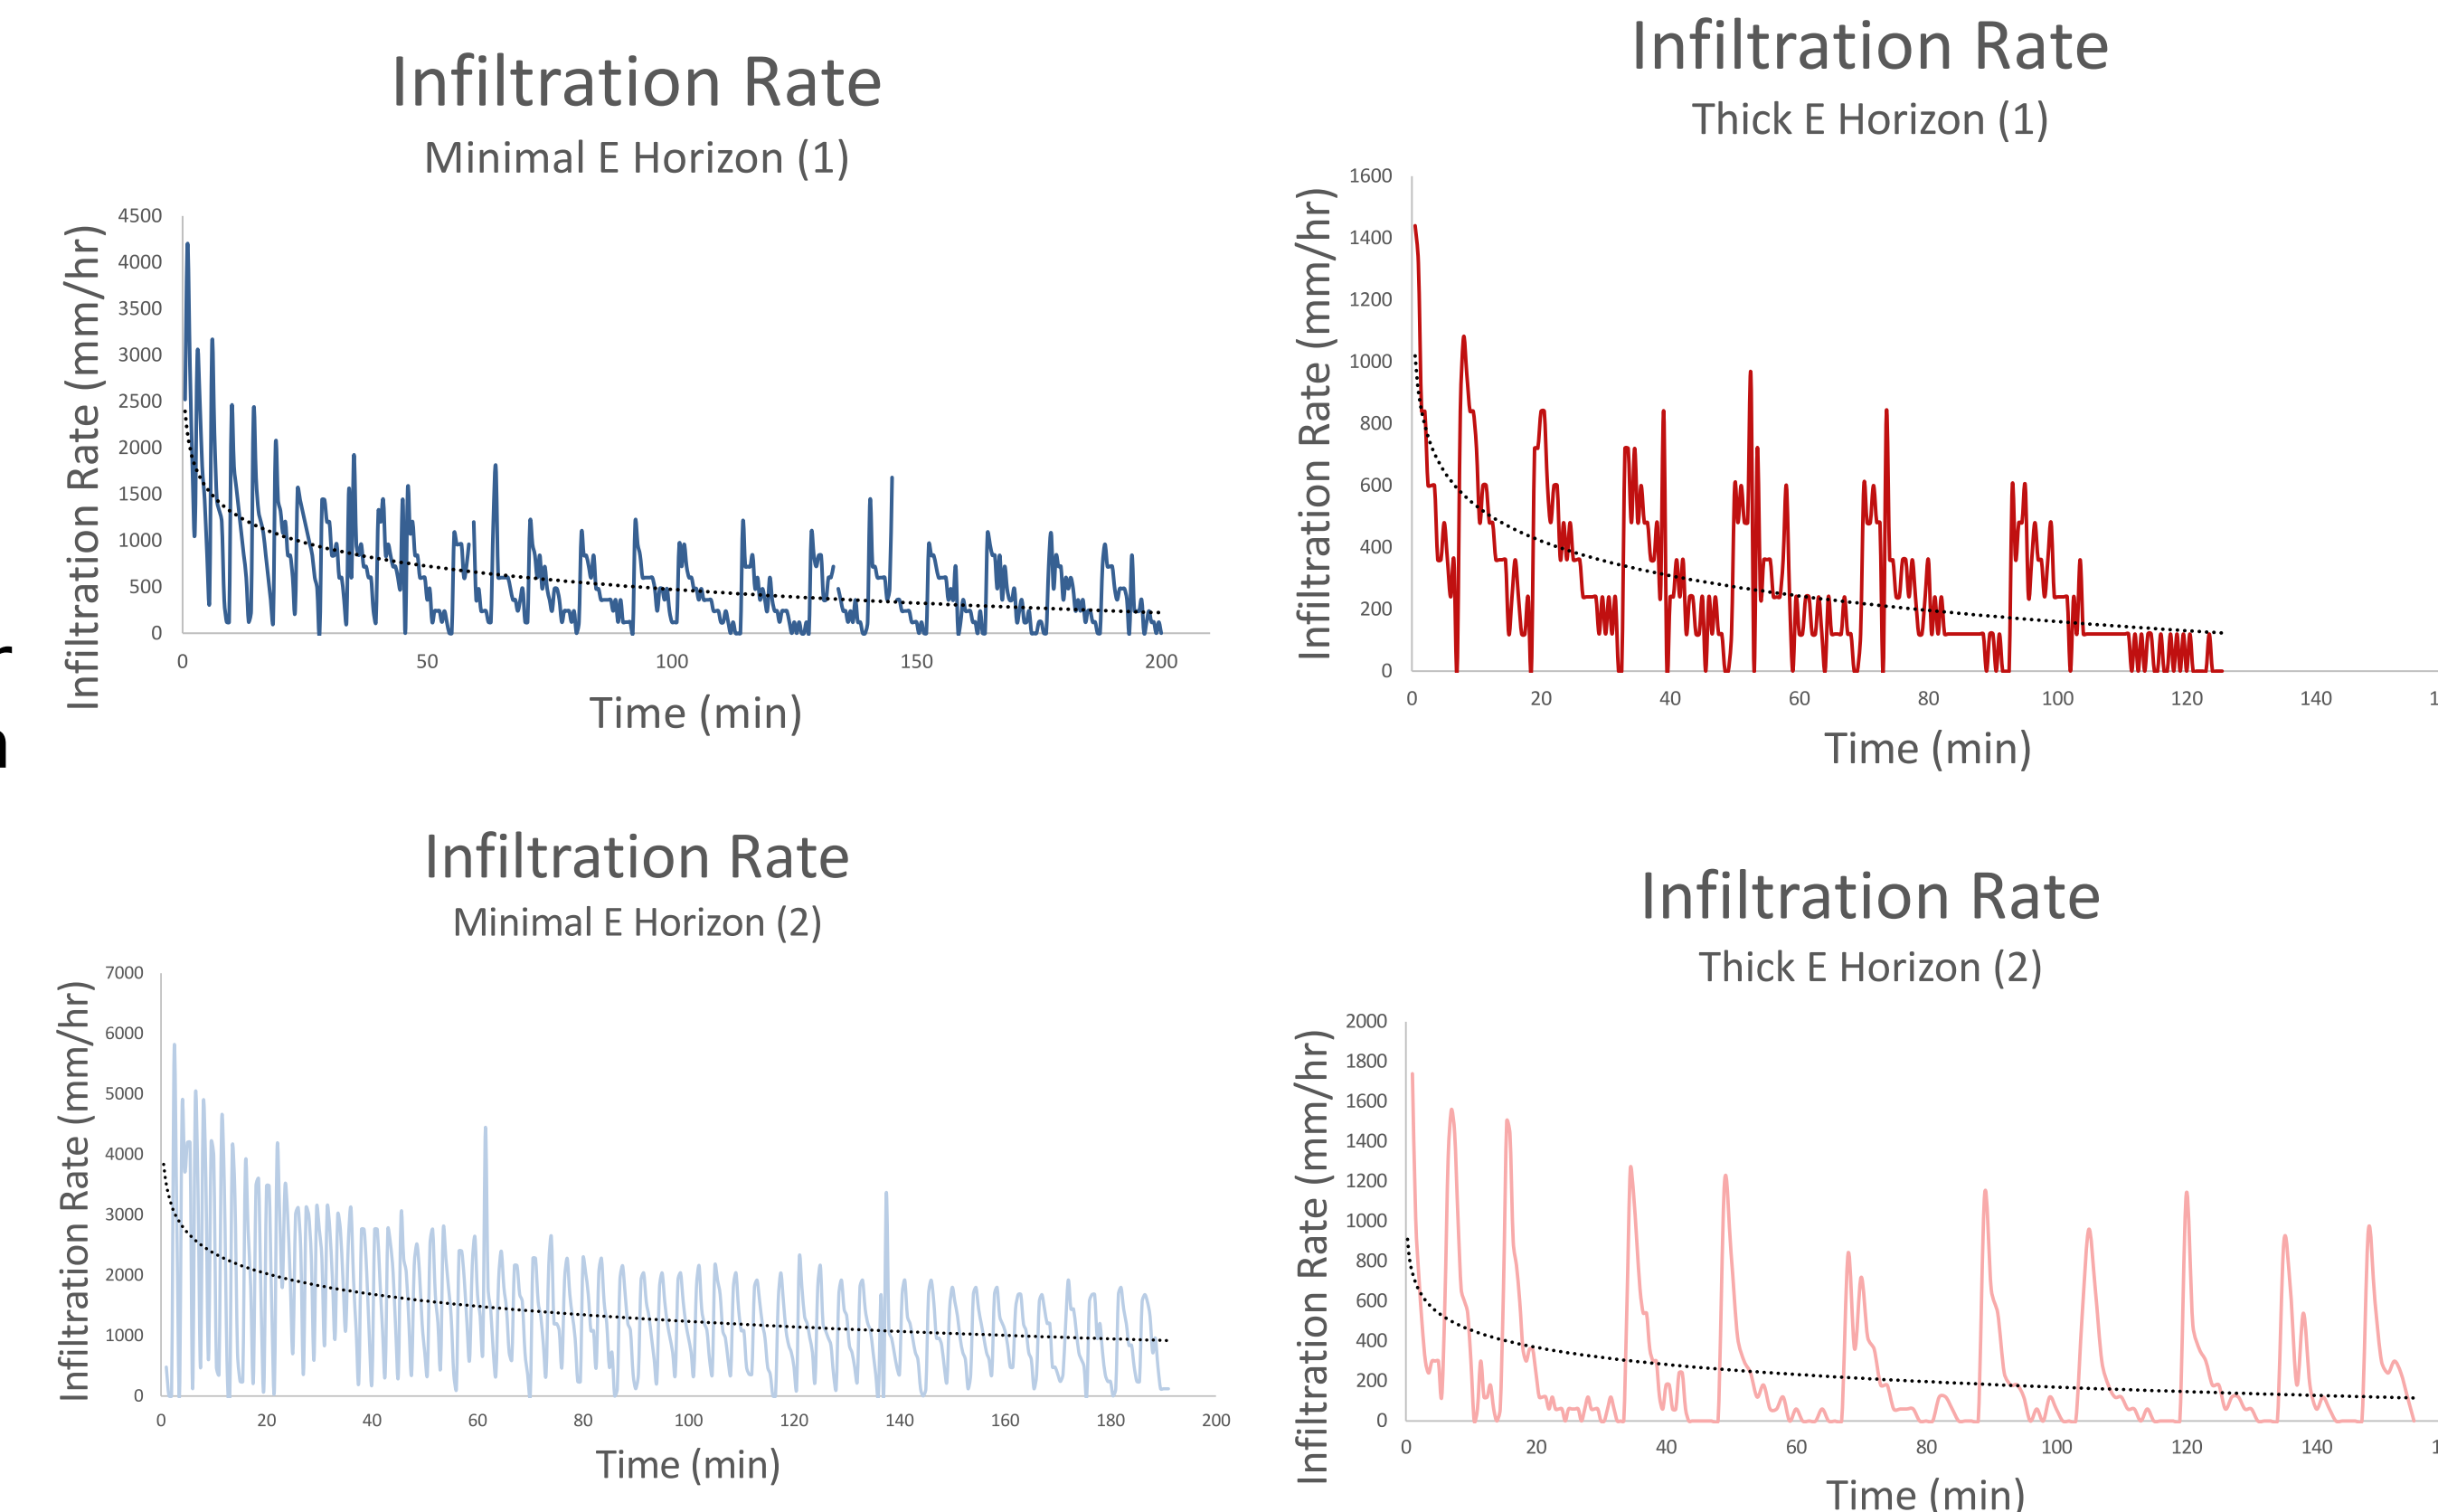

Total Cumulative Water Depth

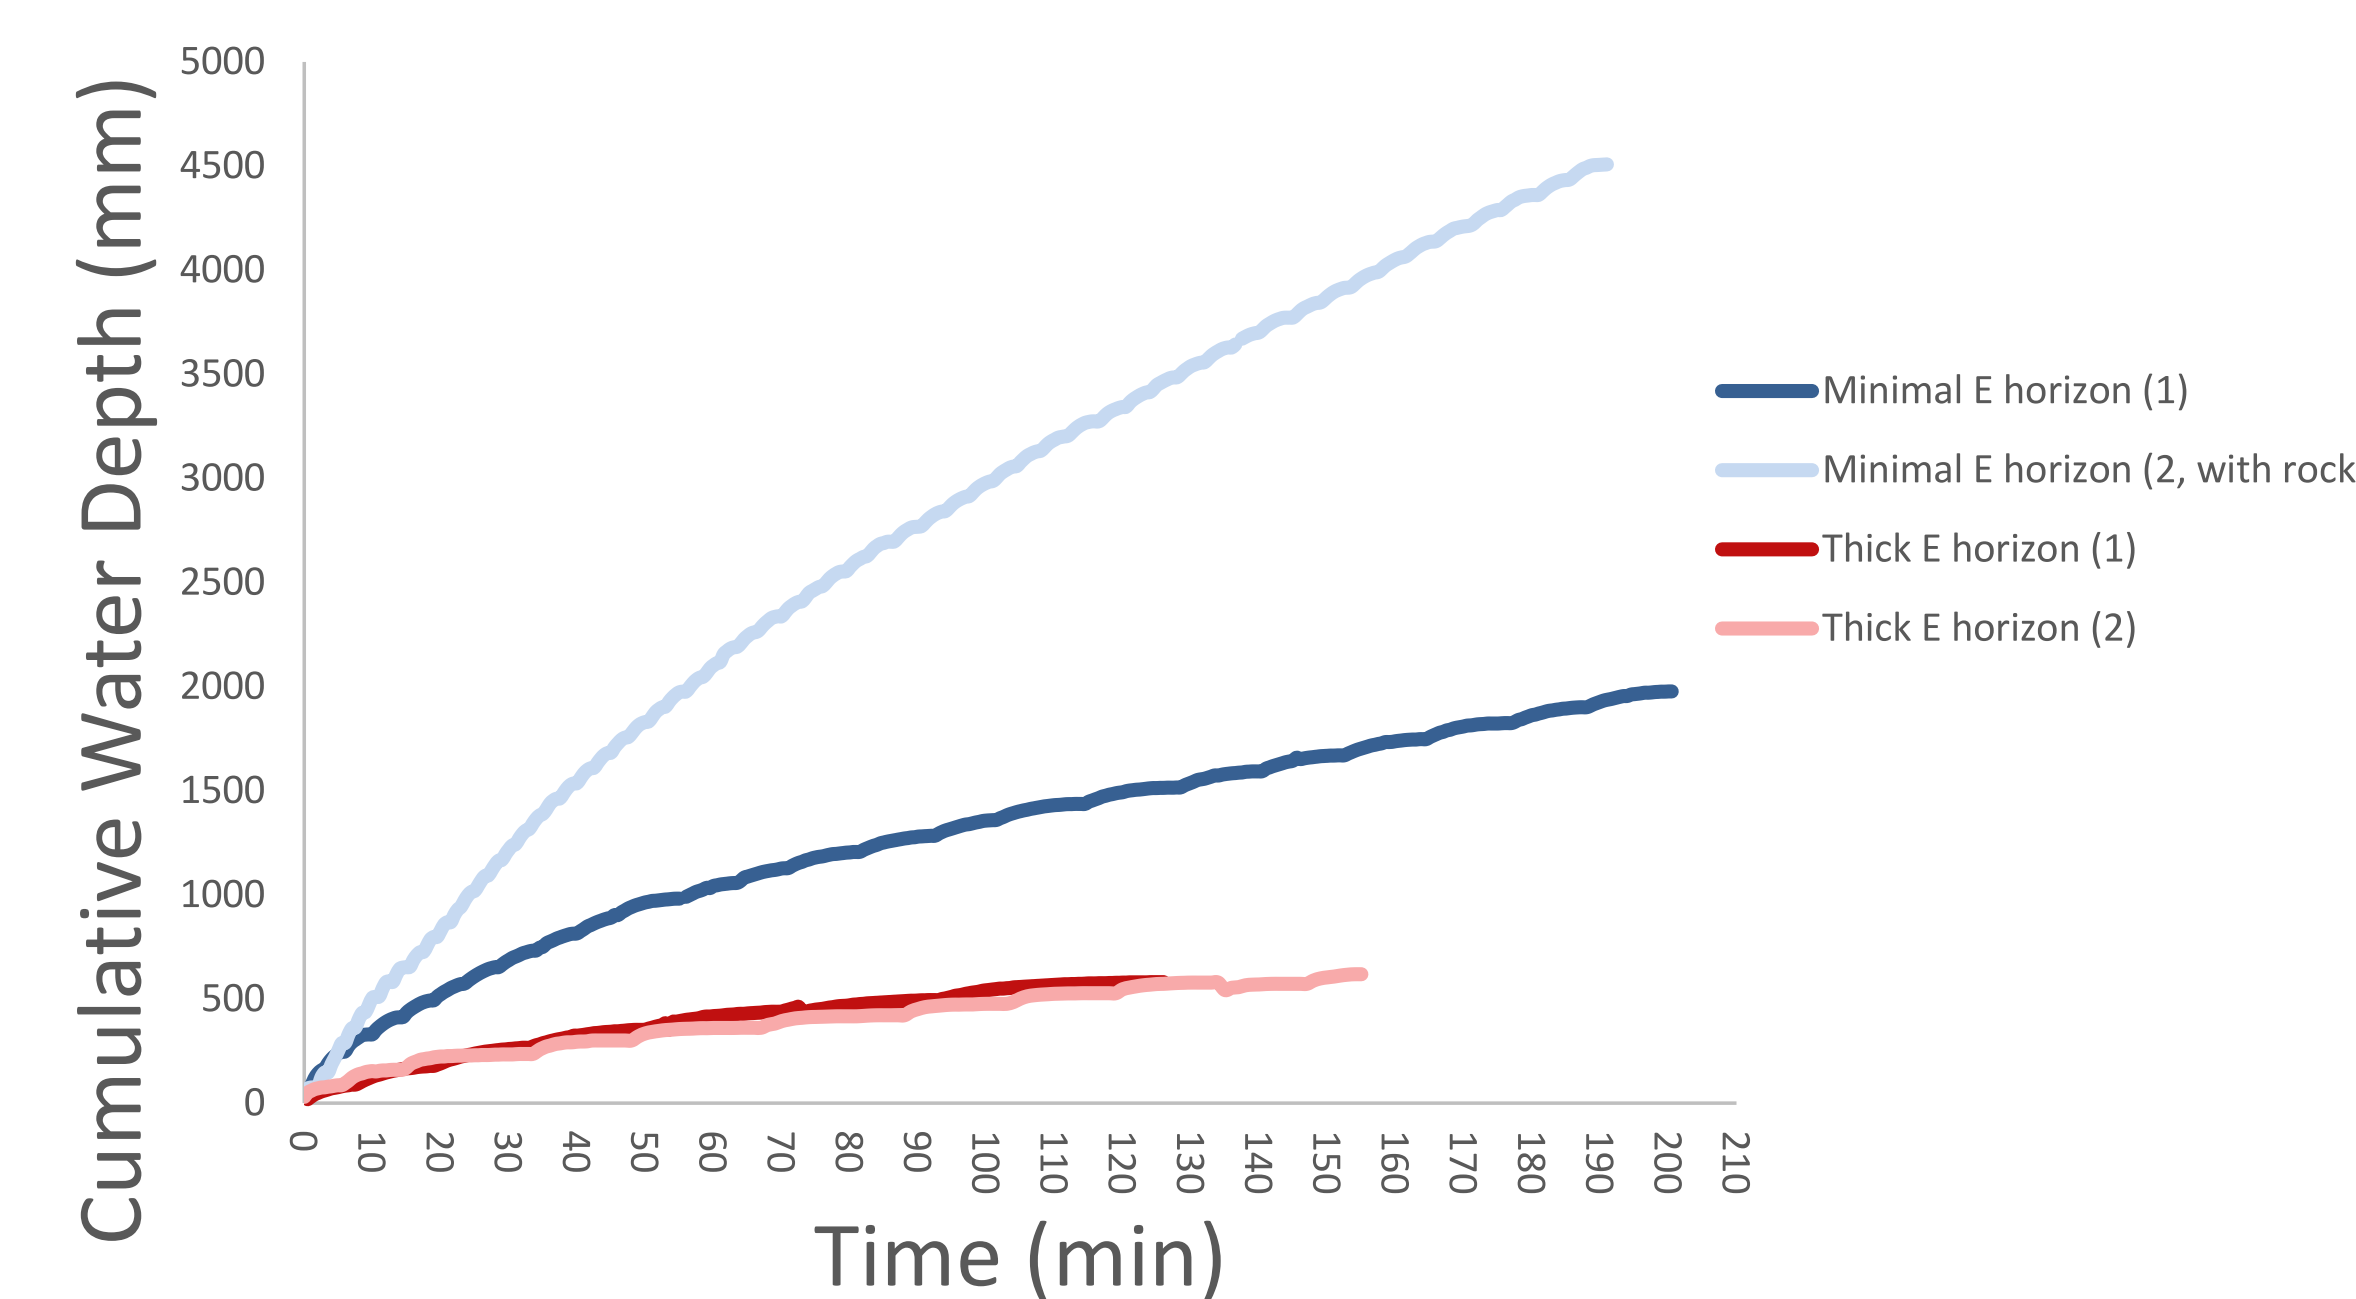

As observed by the tapering of the cumulative depth of the wetting front, Thick E horizon (1), Thick E horizon (2), and Minimal E horizon (1) all reached steady state, and when saturated, soil with a thick E horizon absorbs water at a slower rate. Minimal E horizon (2) did not reach steady state. Subsequent excavation of the site revealed the presence of a large cobble directly below the infiltrometer at a depth of 8 cm, indicating that rocks increase the rate at which soil can absorb water.

Conclusions

Potential for runoff during storm events is complex and moderated by many variables, including local surface cover and soil profile, slope grade, and leaf litter cover. Observations based on each of these variables are as follows:

- The presence of a thick E horizon may allow for horizontal flow within the eluviated layer before the wetting of the underlying, clay-rich B horizon
- In locations with soil-dominated surface cover on low, medium and high grade slopes, more runoff was observed on steeper slopes
- On bouldery surface cover, the removal of leaf litter allowed organic-rich mats to absorb some water before infiltrating into macropores, whereas leaf litter left in place acted as a direct pathway to macropores, leaving the underlying organic-rich mat almost completely dry

References

- Brantley, Susan L., et al. "Designing a suite of measurements to understand the critical zone." *Earth Surface Dynamics* 4.1 (2016): 211.
- Qu, Yizhong, and Christopher J. Duffy. "A semidiscrete finite volume formulation for multiprocess watershed simulation." *Water Resources Research* 43.8 (2007).